




Walco 766C-2

For continuous, simultaneous lamination of top and bottom foils, papers & vinyl onto the top and bottom of various flat panels with PVA or EVA adhesives. Includes hot rolls for laminating pre-glued papers and foils. **MANY OPTIONS.**

Standard Specifications:

- SUBSTRATES—70.0" min. to 12-foot maximum
 - Width—36" min. to 61.0" maximum
 - Thickness—0.10" min. to 1-5/8" max.
- OVERLAY—36" to 64" width maximum.
- ROLL DIAMETERS—up to 20.0 inches.
- MATERIALS
 - Paper—23 gram to 80 gram max.
 - Vinyl—0.002" min. to .008" max.
- ADHESIVES—PVA or EVA
- PRODUCTION CAPACITY
 - 10—120 FPM
 - Up to 5400 panels (8.0 ft) / 7.5 hr day.

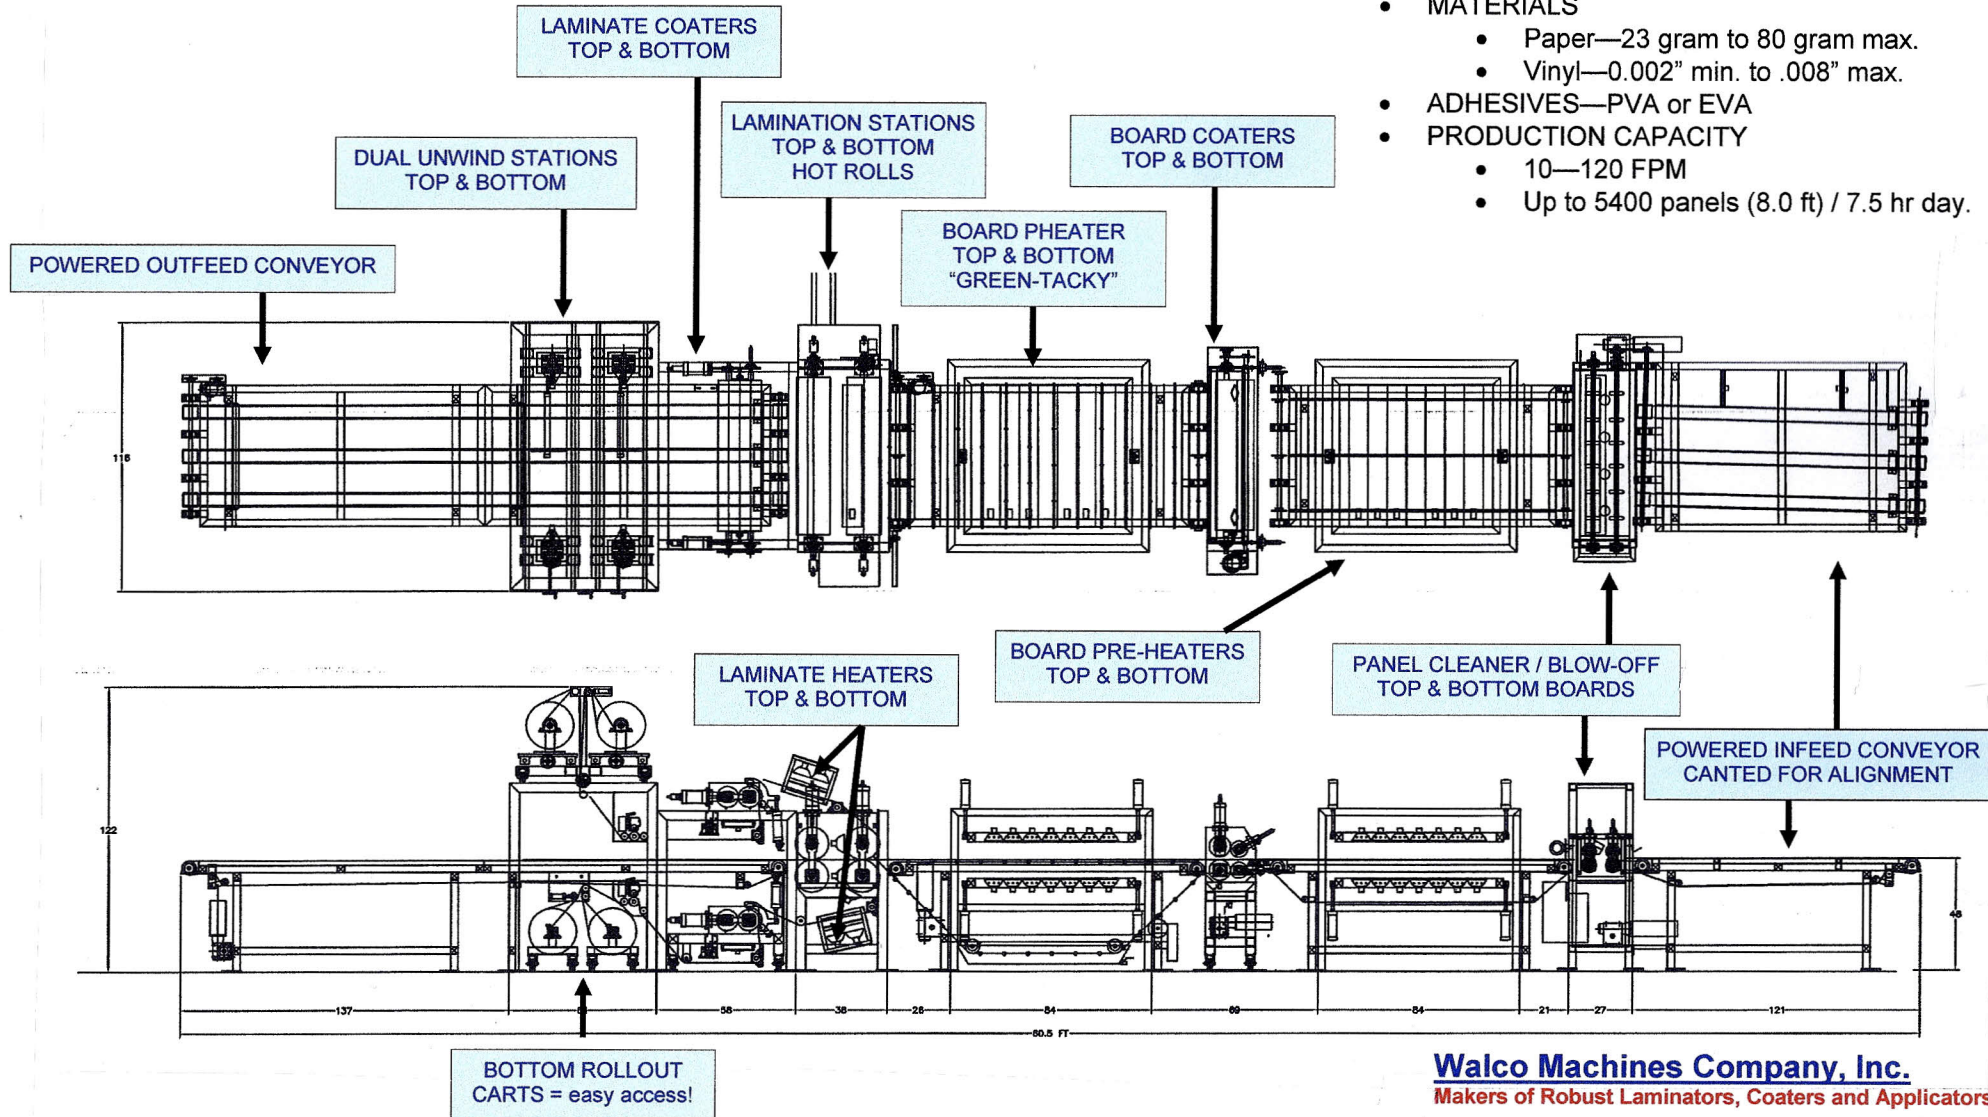

MADE IN THE U.S.A.



Walco Machines Company, Inc.
Makers of Robust Laminators, Coaters and Applicators

9359 Feron Blvd.
Rancho Cucamonga, CA 91730 USA

909-483-3333 (phone)
909-483-3338 (fax)

www.WalcoMachines.com